

311-CD-109-005

EOSDIS Core System Project

Release 4 Subscription Server Database Design and Schema Specifications for the ECS Project

Final

March 1999

**This document has not yet been approved by the
Government for general use or distribution.**

Raytheon Systems Company
Upper Marlboro, Maryland

Release 4

Subscription Server Database Design and Schema Specifications for the ECS Project

Final

March 1999

Prepared Under Contract NAS5-60000
CDRL Item #050

RESPONSIBLE ENGINEER

Maureen Muganda /s/	2/26/99
Maureen Muganda	Date
EOSDIS Core System Project	

SUBMITTED BY

Mary Armstrong /s/	2/26/99
Mary Armstrong, Systems Engineering Manager	Date
EOSDIS Core System Project	

Raytheon Systems Company
Upper Marlboro, Maryland

This page intentionally left blank.

Preface

This document describes the data design and database specification for the Subscription Server subsystem. It is one of eight documents comprising the detailed database design specifications for each of the ECS subsystems.

The subsystem database design specifications for the as delivered system include:

311-CD-102 Data Management (DM) Subsystem Database Design and Database Schema Specifications for the ECS Project

311-CD-103 Ingest Subsystem Database Design and Database Schema Specifications for the ECS Project

311-CD-104 Interoperability Subsystem (IOS) Database Design and Database Schema Specifications for the ECS Project

311-CD-105 Management Support Subsystem (MSS) Database Design and Database Schema Specifications for the ECS Project

311-CD-106 Planning and Data Processing Subsystem (PDPS) Database Design and Database Schema Specifications for the ECS Project

311-CD-107 Science Data Server (SDSRV) Subsystem Database Design and Database Schema Specifications for the ECS Project

311-CD-108 Storage Management (STMGMT) Subsystem Database Design and Database Schema Specifications for the ECS Project

311-CD-109 Subscription Server (SUBSRV) Subsystem Database Design and Database Schema Specifications for the ECS Project

This submittal meets the milestone specified in the Contract Data Requirements List (CDRL) of NASA Contract NAS5-60000. It is a formal contract deliverable with an approval code 1. It requires Government review and approval prior to acceptance and use. This document is under ECS contractor configuration control. Once approved, contractor approved changes will be handled in accordance with Class I and Class II change control requirements described in the EOS Configuration Management Plan, and changes to this document shall be made by Document Change Notice (DCN) or by complete revision.

Entity Relationship Diagrams (ERDs) presented in this document have been exported directly from tools and some cases contain too much detail to be easily readable within hard copy page constraints. The reader is encouraged to view these drawings on-line using the Portable Document Format (PDF) electronic copy available via the ECS Data Handling System (ECS) on the world wide web at <http://edhs1.gsfc.nasa.gov>.

Any questions should be addressed to:

Data Management Office
The ECS Project Office
Raytheon Systems Company
1616 McCormick Drive
Upper Marlboro, MD 20774-5301

Abstract

This document outlines Release 4 Drop 4PX “as-built” database design and database schema of the Subscription Server database including the physical layout of the database and initial installation parameters.

Keywords: data, database, design, configuration, database installation, scripts, security, data model, data dictionary, replication, performance tuning, SQL server, database security, replication, database scripts

This page intentionally left blank.

Change Information Page

List of Effective Pages			
Page Number		Issue	
Title		Submitted as Final	
iii through x		Submitted as Final	
1-1 through 1-2		Submitted as Final	
2-1 through 2-2		Submitted as Final	
3-1 through 3-2		Submitted as Final	
4-1 through 4-12		Submitted as Final	
5-1 through 5-2		Submitted as Final	
6-1 through 6-2		Submitted as Final	
7-1 through 7-2		Submitted as Final	
AB-1 through AB-8		Submitted as Final	
Document History			
Document Number	Status/Issue	Publication Date	CCR Number
311-CD-109-001	Draft	January 1998	97-1755
311-CD-109-002	Draft	May 1998	98-0620
311-CD-109-003	Draft	July 1998	98-0866
311-CD-109-004	Draft	December 1998	98-1267
311-CD-109-005	Submitted as Final	March 1999	99-0166

This page intentionally left blank.

Contents

Preface

Abstract

1. Introduction

1.1 Identification	1-1
1.2 Scope	1-1
1.3 Purpose	1-1
1.4 Audience.....	1-1

2. Related Documents

2.1 Applicable Documents	2-1
2.2 Information Documents.....	2-2

3. Database Configurations

3.1 Server Configurations	3-1
3.2 Storage Device Layouts	3-1

4. Data Design

4.1 Database Overview.....	4-1
4.1.1 Physical Data Model Entity Relationship Diagram	4-1
4.1.2 Tables	4-2
4.1.3 Columns	4-3
4.1.4 Column Domains	4-4
4.1.5 Rules.....	4-5
4.1.6 Defaults	4-5

4.1.7 Views.....	4-5
4.1.8 Integrity Constraints.....	4-5
4.1.9 Triggers	4-5
4.1.10 Stored Procedures.....	4-5
4.2 File Usage.....	4-11
4.2.1 Files Definitions	4-11
4.2.2 Attributes.....	4-11
4.2.3 Attribute Domains.....	4-11

5. Performance and Tuning Factors

5.1 Indexes	5-1
5.2 Segments	5-1
5.3 Named Caches.....	5-1

6. Database Security

6.1 Initial Users	6-1
6.2 Groups	6-1
6.3 Roles	6-1
6.4 Object Permissions.....	6-2

7. Scripts

7.1 Installation Scripts.....	7-1
7.2 De-Installation Scripts.....	7-1
7.3 Backup/Recovery Scripts	7-1
7.4 Miscellaneous Scripts.....	7-1

List of Figures

4-1. ERD Key.....	4-1
4-2. SUBSRV ERD.....	4-2

Abbreviations and Acronyms

1. Introduction

1.1 Identification

This Subscription Server (SUBSRV) Database Design and Database Schema Specification document, Contract Data Requirement List (CDRL) Item Number 050, whose requirements are specified in Data Item Description DID 311/DV1, is a required deliverable under the Earth Observing System (EOS) Data and Information System (EOSDIS) Core System (ECS), Contract NAS5-60000.

1.2 Scope

The SUBSRV Database Design and Database Schema Specification document describes the data design and database specifications to support the data requirements of Release 4 Drop 4PX SUBSRV software.

1.3 Purpose

The purpose of the SUBSRV Database Design and Database Schema Specification document is to support the maintenance of SUBSRV data and databases throughout the life cycle of ECS. This document communicates the database implementation in sufficient detail to support ongoing configuration management.

1.4 Audience

This document is intended to be used by ECS maintenance and operations staff. The document is organized as follows:

Section 1 provides information regarding the identification, purpose, scope and audience of this document.

Section 2 provides a listing of the related documents, which were used as a source of information for this document.

Section 3 provides a mapping database to hardware components.

Section 4 contains the SUBSRV physical data model which is the database tables, triggers, stored procedures, and flat files.

Section 5 provides a description of database performance and tuning features such as indexes, caches, and data segments.

Section 6 provides a description of the security infrastructure used and a list of the users, groups, and permissions available upon initial installation.

Section 7 contains replication design and implementation details.

This page intentionally left blank.

2. Related Documents

2.1 Applicable Documents

The following documents, including Internet links, are referenced in the SUBSRV Database Design and Database Schema Specification, or are directly applicable, or contain policies or other directive matters that are binding upon the content of this volume. Internet links cannot be guaranteed for accuracy or currency.

920-TDG-009	GSFC Release B0 DAAC Database Information
920-TDN- 009	NSIDC Release B0 DAAC Database Information
920-TDE-009	EDC Release B0 DAAC Database Information
920-TDL-009	LARC Release B0 DAAC Database Information
920-TDS-009	SMC Release B0 DAAC Database Information
920-TDM-009	Mini-DAAC Release B0 Database Information
920-TDG-001	GSFC Version 2.0 Hardware Diagram
920-TDN-001	NSIDC Version 2.0 Hardware Diagram
920-TDE-001	EDCC Version 2.0 Hardware Diagram
920-TDL-001	LARC Version 2.0 Hardware Diagram
920-TDS-001	SMC Version 2.0 Hardware Diagram
920-TDM-001	Mini-DAAC Version 2.0 Hardware Diagram
920-TDG-002	GSFC Version 2.0 Hardware Software Mapping
920-TDN-002	NSIDC Version 2.0 Hardware Software Mapping
920-TDE-002	EDC Version 2.0 Hardware Software Mapping
920-TDL-002	LARC Version 2.0 Hardware Software Mapping
920-TDS-002	SMC Version 2.0 Hardware Software Mapping
920-TDM-002	Mini-DAAC Version 2.0 Hardware Software Mapping

2.2 Information Documents

The following documents, although not directly applicable, amplify or clarify the information presented in this document. These documents are not binding on this document.

311-CD-102	Data Management (DM) Subsystem Database Design and Database Schema Specifications for the ECS Project
311-CD-103	Ingest Subsystem (INS) Database Design and Database Schema Specifications for the ECS Project
311-CD-104	Interoperability Subsystem (IOS) Database Design and Database Schema Specifications for the ECS Project
311-CD-105	Management Support Subsystem (MSS) Database Design and Database Schema Specifications for the ECS Project
311-CD-106	Planning and Data Processing Subsystem (PDPS) Database Design and Database Schema Specifications for the ECS Project
311-CD-107	Science Data Server (SDSRV) Subsystem Database Design and Database Schema Specifications for the ECS Project
311-CD-108	Storage Management (STMGT) Subsystem Database Design and Database Schema Specifications for the ECS Project

3. Database Configurations

3.1 Server Configurations

The database configuration of the SUBSRV server varies from DAAC to DAAC based on individualized DAAC requirements and hardware availability. These DAAC-specific database configurations are detailed on the following documents:

920-TDG-009 GSFC Release B0 DAAC Database Information

920-TDN- 009 NSIDC Release B0 DAAC Database Information

920-TDE-009 EDC Release B0 DAAC Database Information

920-TDL-009 LARC Release B0 DAAC Database Information

920-TDS-009 SMC Release B0 DAAC Database Information

920-TDM-009 Mini-DAAC Release B0 Database Information

These documents are maintained as part of the ECS baseline and available on the world wide web at the URL <http://cmdm.east.hitc.com/baseline/>.

3.2 Storage Device Layouts

Storage Device layouts, disk partitions, vary from DAAC to DAAC based on the amount of data storage expected to be needed to accommodate a particular DAAC's storage requirements. Disk partitions for the SUBSRV server at each DAAC is detailed in the following documents:

922-TDG-009 Release B0 Interface Server Disk & RAID Partitioning Diagram

922-TDN-009 Release B0 Interface Server Disk & RAID Partitioning Diagram

922-TDE-009 Release B0 Interface Server Disk & RAID Partitioning Diagram

922-TDL-009 Release B0 Interface Server Disk & RAID Partitioning Diagram

922-TDS-009 Release B0 Interface Server Disk & RAID Partitioning Diagram

922-TDM-009 Release B0 Interface Server Disk & RAID Partitioning Diagram

These documents are maintained as part of the ECS baseline and available on the world wide web at the URL <http://cmdm.east.hitc.com/baseline/>.

This page intentionally left blank.

4. Data Design

4.1 Database Overview

The SUBSRV database implements the large majority of the persistent data requirements for the SUBSRV subsystem. The database is designed in such a manner as to satisfy business policy while maintaining data integrity and consistency. Database tables are implemented using the Sybase Relational Database Management system (DBMS) version 11.0.3.3. All components of the SUBSRV database are described in the section which follows in sufficient detail to support maintenance needs.

4.1.1 Physical Data Model Entity Relationship Diagram

The Entity Relationship Diagram (ERD) presents a schematic depiction of the SUBSRV physical data model. The ERDs presented here for the SUBSRV database were produced using the S-Designer Data Architect Computer Aided Software Engineering (CASE) tool. ERDs represent the relationship between entities or database tables. The key for the symbols used in the ERDs follows.

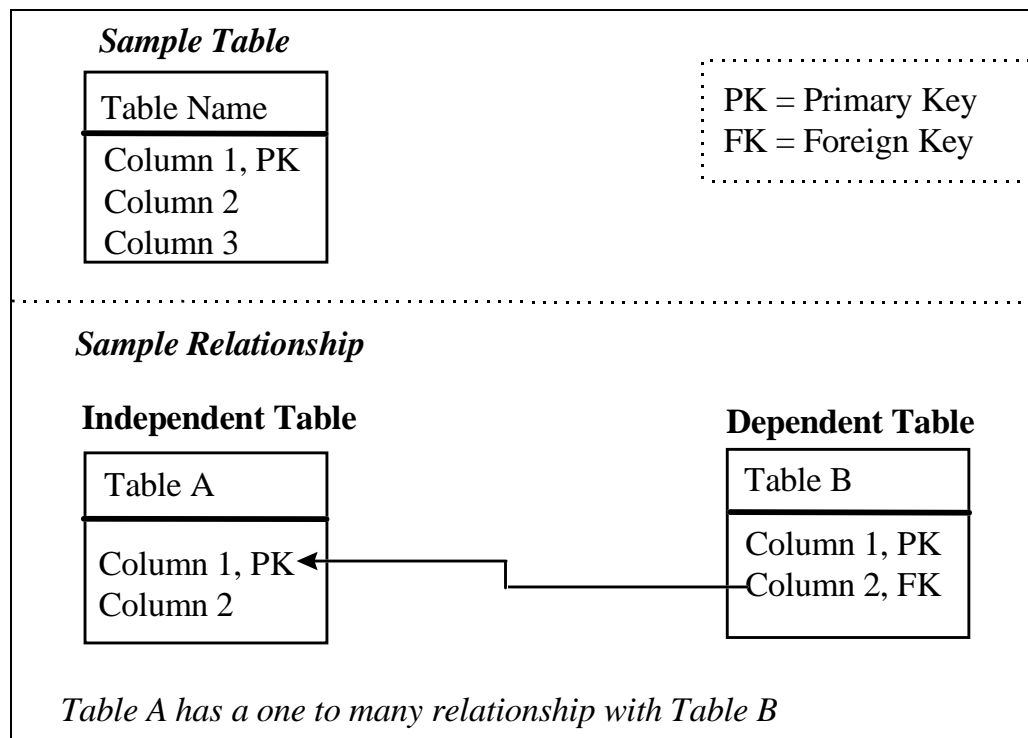


Figure 4-1. ERD Key

The ERDs for the SUBSRV database are shown in Figure 4-2.

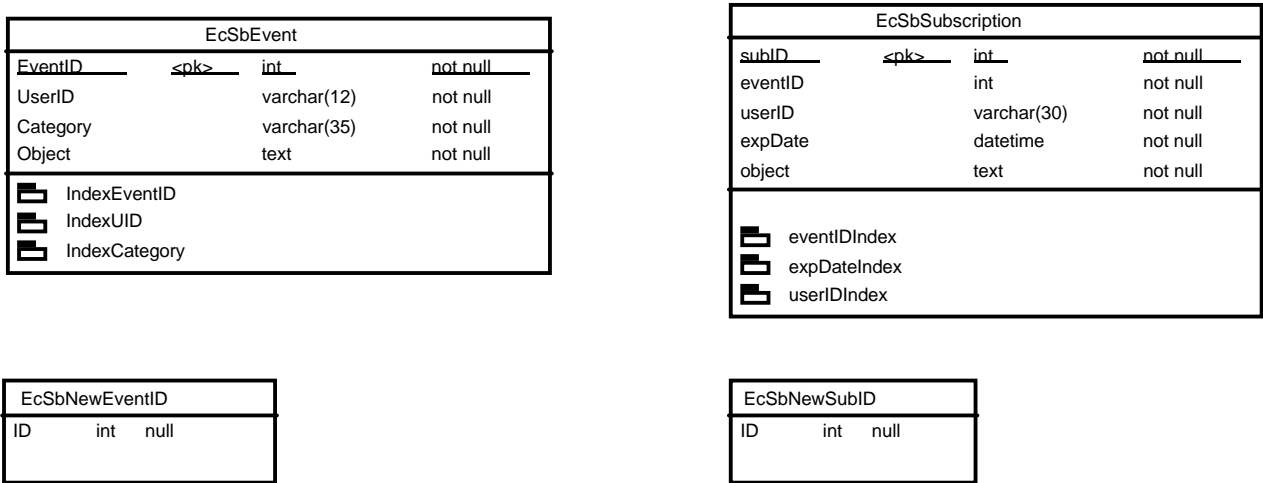


Figure 4-2. SUBSRV ERD

4.1.2 Tables

A listing of each of the tables in the SUBSRV database is given here. A brief definition of each of these tables follows.

Table Name
EcSbEvent
EcSbEvent
EcSbNewEventID
EcSbNewEventID
EcSbNewSubID
EcSbNewSubID
EcSbSubscription
EcSbSubscription

Table: EcSbEvent

Description

Contains the list of events to which a user, or another subsystem can subscribe.

Table Layout

Column	Type	PK	Mandatory
Category	varchar(35)	No	Yes
EventID	int	Yes	Yes

Object	text	No	Yes
UserID	varchar(12)	No	Yes

Table: EcSbNewEventID

Description

This table is used to generate the next available ID for the EcSbEvent table.

Table Layout

Column	Type	PK	Mandatory
ID	Int	No	No

Table: EcSbNewSubD

Description

This table is used to generate the next available ID for the EcSbSubscription table.

Table Layout

Column	Type	PK	Mandatory
ID	int	No	No

Table: EcSbSubscription

Description

This table lists all the user and subsystem subscriptions. Each event can have many subscriptions. Each user can have many subscriptions. The same user can subscribe to the same event with different constraints. It is also possible that a user could subscribe to the same event with the same constraints.

Table Layout

Column	Type	PK	Mandatory
EventID	int	No	Yes
ExpDate	datetime	No	Yes
Object	text	No	Yes
SubID	int	Yes	Yes
UserID	varchar(30)	No	Yes

4.1.3 Columns

Brief definitions of each of the columns present in the database tables defined above are contained herein.

Column: Category

Description

Qualifier describing the type or category of a subscribable event. Currently not used.

Column: EventID

Description

Unique identifier of the event.

Column: expDate

Description

Date and time that the subscriptions expire. Default is today. Must be \geq today.

Column: ID

Description

The identification number available for the next event generated.

Column: ID

Description

The identification number available for the next subscription generated.

Column: object

Description

Event information including qualifiable metadata.

Column: subID

Description

Unique identifier of the subscription.

Column: UserID

Description

User registering the event.

4.1.4 Column Domains

Domains specify the ranges of values allowed for a given table column. Sybase supports the definition of specific domains to further limit the format of data for a given column. Sybase domains are, in effect, user-defined data types. There are no domains defined in the SUBSRV database.

4.1.5 Rules

Sybase supports the definitions of rules. Rules provide a means for enforcing domain constraints on a given column. There are no rules defined in Sybase for the SUBSRV database.

4.1.6 Defaults

Defaults are used to supply a value for a column when one is not defined at insert time. There are no defaults defined in Sybase in the SUBSRV database.

4.1.7 Views

Sybase allows the definition of views as a means of limiting an application or users access to data in a table or tables. Views create a logical table from columns found in one or more tables. There are no views defined in the SUBSRV database.

4.1.8 Integrity Constraints

Sybase allows the enforcement of referential integrity via the use of declarative integrity constraints. Integrity constraints allow the SQL server to enforce primary and foreign key integrity checks without automatically without requiring programming. Sybase is only ANSI-92 compliant, however, therefore its constraints support “restrict-only” operations. This means that a row can not be deleted or updated if their are rows in other tables having a foreign key dependency on that row. Cascade delete and update operations can not be performed if a declarative constraint has been used. There are no declarative integrity constraints defined in the SUBSRV database.

4.1.9 Triggers

Sybase supports the enforcement of business policy via the use of triggers. A trigger is best defined as set of activities or checks that should be performed automatically when ever a row is inserted, updated, or deleted from a given table. Sybase allows the definition of insert, update, and delete trigger per table. No triggers are currently defined in the SUBSRV database.

4.1.10 Stored Procedures

Sybase also includes support for business policy via the use of stored procedures. Stored procedures are typically used to capture a set of activities or checks that will be performed on the database repeatedly to enforce business policy and maintain data integrity. Stored procedures are parsed and compiled SQL code that reside in the database and may be called by name by an application, trigger or another stored procedure. A listing of each of the stored procedures in the SUBSRV database is given here. A brief definition of each of these stored procedures follows.

Procedure List

Name	Description
ProcGetAllEvents	Retrieves all registered events.
ProcGetAllSubs	Retrieves all existing subscriptions.
ProcGetCatEvents	Retrieves all events for a given category.
ProcGetEvent	Retrieves a specific event.
ProcGetEventID	Returns the next available event ID.
ProcGetEventIDSubs	Selects subscriptions made against a specific event.
ProcGetExpSubs	Retrieves events scheduled to expire on a specific date.
ProcGetSub	Retrieves a specific subscription.
ProcGetSubID	Returns the next available subscription ID.
ProcGetUIDEvents	Retrieves events for a specific user.
ProcGetUserIDSubs	Retrieves subscriptions for a specific user.
ProcRemoveEvent	Deletes a specific event.
ProcRemoveSub	Deletes a specific subscription.

Procedure: ProcGetAllEvents

Code

```
create proc ProcGetAllEvents
as
    select Object from EcSbEvent
    if @@error != 0
    begin
        raiserror 110022 "ProcGetAllEvents: can not access EcSbEvent table "
        return -999
    end
return
go
```

Procedure: ProcGetAllSubs

Code

```
create proc ProcGetAllSubs
as
    select object from EcSbSubscription
    if @@error != 0
    begin
        raiserror 110026 "ProcGetAllSubs: can not access EcSbSubscription table "
        return -999
    end
return
go
```

Procedure: ProcGetCatEvents

Code

```
/* This Proc will be deleted as the new schema is updated */
create proc ProcGetCatEvents (@Category varchar(35))
as
    select Object from EcSbEvent
    where Category = @Category
return
go
```

Procedure: ProcGetEvent

Code

```
create proc ProcGetEvent (@EventID int)
as
    if (@EventID <= 0)
    begin
        raiserror 110024 "Procedure ProcGetEvent expects parameter @EventID, which was not
supplied."
        return -900
    end
    select Object from EcSbEvent
    where EventID = @EventID
    if @@error !=0
    begin
        raiserror 110022 "ProcGetEvent: can not access EcSbEvent table "
        return -999
    end
return
go
```

Procedure: ProcGetEventID

Code

```
create proc ProcGetEventID
as
    begin transaction pubs2
    update EcSbNewEventID set ID = ID + 1
    select ID from EcSbNewEventID
commit pubs2
return
go
```


Procedure: ProcGetEventIDSubs

Code

```
create proc ProcGetEventIDSubs(@eventID int)
as
    if (@eventID <= 0)
        begin
            raiserror 110028 "Procedure ProcGetEventIDSubs expects parameter @eventID, which was
not supplied. "
            return -900
        end
    select object from EcSbSubscription
    where eventID = (@eventID)
    if @@error != 0
        begin
            raiserror 110122 "ProcGetEventIDSubs: can not access EcSbSubscription table "
            return -999
        end
    return
go
```

Procedure: ProcGetExpSubs

Code

```
create proc ProcGetExpSubs (@expDate datetime)
as
    if (@expDate is null)
        begin
            raiserror 110027 "Procedure ProcGetExpSubs expects parameter @expDate, which was not
supplied. "
            return -900
        end
    select object from EcSbSubscription
    where expDate = (@expDate)
    if @@error != 0
        begin
            raiserror 110122 "ProcGetExpSubs: can not access EcSbSubscription table "
            return -999
        end
    return
go
```

Procedure:ProcGetSub

Code

```
create proc ProcGetSub(@subID int)
```

```

as
if (@subID <= 0)
begin
raiserror 110030 "Procedure ProcGetSub expects parameter @subID, which was not supplied.
"
return -900
end
select object from EcSbSubscription
where subID = (@subID)
if @@error != 0
begin
raiserror 110122 "ProcGetSub : can not access EcSbSubscription table "
return -999
end
return
go

```

Procedure: ProcGetSubID

Code

```

create proc ProcGetSubID
as
begin transaction pubs2
update EcSbNewSubID set ID = ID + 1
select ID from EcSbNewSubID
commit pubs2
return
go

```

Procedure: ProcGetUIDEvents

Code

```

create proc ProcGetUIDEvents (@UserID varchar(12))
as
select Object from EcSbEvent
where UserID = @UserID
return
go create proc ProcGetUIDEvents (@UserID varchar(12))
as
if (@UserID is null)
begin
raiserror 110023 "Procedure ProcGetUIDEvents expects parameter @UserID, which was not
supplied."
return -900
end
select Object from EcSbEvent

```

```

where UserID = @UserID
if @@error !=0
begin
    raiserror 110022 "ProcGetUIDEvents: can not access EcSbEvent table "
    return -999
end
return
go

```

Procedure: ProcGetUserIDSubs

Code

```

create proc ProcGetUserIDSubs(@userID varchar(30))
as
    if (@userID is null)
    begin
        raiserror 110029 "Procedure ProcGetUserIDSubs expects parameter @userID, which was not
supplied. "
        return -900
    end
    select object from EcSbSubscription
    where userID = (@userID)
    if @@error != 0
    begin
        raiserror 110122 "ProcGetUserIDSubs: can not access EcSbSubscription table "
        return -999
    end
return
go

```

Procedure: ProcRemoveEvent

Code

```

create proc ProcRemoveEvent (@EventID int)
as
    if (@EventID <= 0)
    begin
        raiserror 110025 "Procedure ProcRemoveEvent expects parameter @EventID, which was not
supplied."
        return -900
    end
    delete EcSbEvent
    where EventID = (@EventID)
    if @@error != 0
    begin
        raiserror 110022 "ProcRemoveEvent: can not access EcSbEvent table "

```

```

        return -999
    end
return
go

```

Procedure: ProcRemoveSub

Code

```

create proc ProcRemoveSub (@subID int)
as
    if (@subID <= 0)
    begin
        raiserror 110031 "Procedure ProcRemoveSub expects parameter @subID, which was not
supplied. "
        return -900
    end
    delete EcSbSubscription
    where subID= (@subID)
    if @@error != 0
    begin
        raiserror 110122 "ProcRemoveSub: can not access EcSbSubscription table "
        return -999
    end
return
go

```

4.2 File Usage

There are cases when the implementation of a persistent data requirement is better suited to a flat file than to a database table. A typical example of such data is system configuration information. System configuration information is fairly static and usually has no explicit relationship to other data in the enterprise. Another common use of files in ECS is as an interface mechanism between ECS and the external world. There are no flat files used in SIBSRV.

4.2.1 Files Definitions

Not applicable.

4.2.2 Attributes

Not applicable.

4.2.3 Attribute Domains

Not applicable.

This page intentionally left blank.

5. Performance and Tuning Factors

5.1 Indexes

An index provides a means of locating a row in a table based on the value of specific columns, without having to scan each row in the table. If used appropriately, indexes can significantly increase data retrieval. Sybase allows the definition of two types of indexes, clustered and non-clustered. In a clustered index, the rows in a table are physically stored in the sort order determined by the index. Clustered indexes are particularly useful, when the data is frequently retrieved in order. Non-clustered indexes differ from their clustered counterpart, in that data is not physically stored in sort order. Only one clustered index may be defined per table. All of the indexes defined against tables in the SUBSRV database are described herein.

Table Code	Index Code	Primary Key	Foreign Key	Unique	Clustered
EcSbEvent	IndexEventID	Yes	No	Yes	No
	IndexUID	No	No	No	Yes
	IndexCategory	No	No	No	No
EcSbNewEventID					
EcSbNewSubID					
EcSbSubscription	EcSbSubscr_160030881	Yes	No	Yes	Yes
	eventIDIndex	No	No	No	No
	expDateIndex	No	No	No	No
	userIDIndex	No	No	No	No

5.2 Segments

Sybase supports the definition of segments. A segment is a named pointer to a storage device or devices. Segments are used to manually place database objects onto particular storage devices. All segments explicitly defined in the SUBSRV database are described herein.

There are no explicitly defined segments for the subscription server database.

5.3 Named Caches

A cache is a block of memory that is used by Sybase to house data pages that are currently being accessed. A named cache is a named block of memory that the SQL server can use to house frequently accessed tables. Assigning a table to cache causes it to be loaded into memory. This greatly increases performance by eliminating the time expense normally associated with disk i/o. Named caches used in the SUBSRV databases are described herein.

There are no named caches for the subscription server database.

This page intentionally left blank.

6. Database Security

6.1 Initial Users

Upon initial installation the following users will have access to SUBSRV database. The level of access is limited to that associated with their assigned group and/or role. A complete definition of each of these groups and roles is given below:

EcSbSubServer

6.2 Groups

Groups are a means of logically associating users with similar data access needs. Once a group has been defined, object and command permissions can be granted to that group. A user who is member of a group inherits all of the permissions granted to that group. Several groups have been defined in the SUBSRV database upon initial installation. A definition of each of these groups is contained herein.

The public group is the only group for the subscription server database.

6.3 Roles

Roles were introduced in Sybase 10 to allow a structured means for granting users the permissions needed to perform standard database administration activities and also provide a means for easily identifying such users. There are six pre-defined roles that may be assigned to a user. A definition of each of these roles follows as well as a description of the types of activities that may be performed by each role.

System Administrator (sa_role) - This role is used to grant a specific user to permissions needed to perform standard system administrator duties including:

- installing SQL server and specific SQL server modules
- managing the allocation of physical storage
- tuning configuration parameters
- creating databases

Site Security Officer (sso_role) - This role is used to grant a specific user the permissions needed to maintain SQL server security including:

- adding server logins
- administrating passwords
- managing the audit system

- granting users all roles except sa_role

Operator (oper_role) - This role is used to grant a specific user the permissions needed to manage backup and recovery of the database including:

- dumping transactions and databases
- loading transactions and databases

Navigator (navigator_role) - This role is used to grant a specific user the permissions needed to manage the navigation server.

Replication (replication_role) - This role is used to grant a specific user the permissions needed to manage the replication server.

Sybase Technical Support (sybase_ts_role) - This role is used to grant a specific user the permissions needed to perform database consistency checker (dbcc), a sybase supplied utility, commands that are considered outside of the realm of normal system administrator activities.

6.4 Object Permissions

Group Permissions

Group	Object	Grant				
		Select	Insert	Update	Delete	Execute
public	ProcGetAllEvents					G
	ProcGetAllSubs					G
	ProcGetCatEvents					G
	ProcGetEvent					G
	ProcGetEventID					G
	ProcGetEventIDSubs					G
	ProcGetExpSubs					G
	ProcGetSub					G
	ProcGetSubID					G
	ProcGetUIDEvents					G
	ProcGetUserIDSubs					G
	ProcRemoveEvent					G
	ProcRemoveSub					G
	Table:					
	EcSbEvent	G	G	G	G	
	EcSbNewEventID	G	G	G	G	
	EcSbNewSubID	G	G	G	G	
	EcSbSubscription	G	G	G	G	

7. Scripts

7.1 Installation Scripts

Any scripts used to support installation of the SUBSRV database are described herein. These files are found in the directory /ecs/formal/CSS/DOF/src/SUBSCRIPTION/sybase.

Script File	Description
EcCsSbDbBuild	Installs/populates Subscription Server database

7.2 De-Installation Scripts

Any scripts used to support de-installation of the SUBSRV database are described herein.

Script File	Description
EcCsSbDbDrop	Drops database objects.

7.3 Backup/Recovery Scripts

Any scripts used to facilitate backup or recovery of the SUBSRV database are described herein.

Script File	Description
EcCsSbDbDump	Creates a backup of the database
EcCsSbDbLoad	Restores the database

7.4 Miscellaneous Scripts

Miscellaneous scripts applicable to the SUBSRV database are described herein.

Script File	Description
EcCsSbDbPatch	Install database schema modifications

This page intentionally left blank.

Abbreviations and Acronyms

ACL	Access Control List
ACMHW	Access and Control Management HWCI
ADC	affiliated data center
ADSHW	Advertising Server HWCI
ADSRV	Advertising Service CSCI
AI&T	algorithm integration and test
AITHW	Algorithm Integration and Test HWCI
AITTL	Algorithm Integration and Test CSCI
AM-1	EOS AM Project spacecraft 1, morning spacecraft series -- ASTER, CERES, MISR, MODIS and MOPITT instruments
ANSI	American National Standards Institute
API	application program (or programming) interface
APID	application's process ID
AQAHW	Algorithm QA HWCI
ASCII	American Standard Code for Information Exchange
ASTER	Advanced Spaceborne Thermal Emission and Reflection Radiometer (formerly ITIR)
AVHRR	Advanced Very High-Resolution Radiometer
BER	bit error rate
BUFR	binary universal format for representation of data
CASE	Computer Aided Software Engineering
CCSDS	Consultative Committee for Space Data Systems
CD	contractual delivery 214-001
CD-ROM	compact disk -- read only memory
CDR	Critical Design Review
CDRL	contract data requirements list
CERES	Clouds and Earth's Radiant Energy System
CI	configuration item

COTS	commercial off-the-shelf (hardware or software)
CPU	central processing unit
CSCI	computer software configuration item
CSDT	Computer Science Data Type
CSMS	Communications and Systems Management Segment (ECS)
CSS	Communications Subsystem
DAAC	Distributed Active Archive Center
DAN	data availability notice
DAO	Data Assimilation Office
DAR	data acquisition request
DAS	data availability schedule
DBMS	Database Management System
DDICT	Data Dictionary CSCI
DDIST	Data Distribution Services CSCI
DDSRV	Document Data Server CSCI
DESKT	Desktop CSCI
DID	data item description
DIM	distributed information manager (SDPS)
DIMGR	Distributed Information Manager CSCI
DIPHW	Distribution and Ingest Peripheral Management HWCI
DMGHW	Data Management HWCI
DMS	Data Management Subsystem
DMWG	Data Management Working Group
DP	Data Provider
DPR	data processing request
DPREP	Science Data Preprocessing CSCI
DPS	Data Processing Subsystem
DRPHW	Data Repository HWCI
DSS	Data Server Subsystem

ECS	EOSDIS Core System
EDC	EROS Data Center
EDHS	ECS Data Handling System
EDOS	EOS Data and Operations System
EOS	Earth Observing System
EOS-AM	EOS Morning Crossing (Descending) Mission -- see AM-1
EOSDIS	Earth Observing System Data and Information System
EROS	Earth Resources Observation System
ESDIS	Earth Science Data and Information System (GSFC)
ESDT	Earth science data types
ESN	EOSDIS Science Network (ECS)
FDDI	fiber distributed data interface
FDF	flight dynamics facility
FDFEPHEM	FDF-generated definitive orbit data
FGDC	Federal Geographic Data Committee
FK	Foreign Key
FOO	Flight of Opportunity
FOS	Flight Operations Segment (ECS)
GB	gigabyte (10^9)
GNU	(recursive acronym: “GNU’s Not Unix”); a project supported by the Free Software Foundation dedicated to the delivery of free software
GPCP	Global Precipitation Climatology Project
GPCP	Global Precipitation Climatology Project
GPI	GOES Precipitation Index
GRIB	GRid In Binary
GSFC	Goddard Space Flight Center
GTWAY	Version 0 Interoperability Gateway CSCI
GUI	graphic user interface
GV	ground validation

HDF	hierarchical data format
HDF-EOS	an EOS proposed standard for a specialized HDF data format
HIPPI	high performance parallel interface
HMI	human machine interface
HTML	HyperText Markup Language
HTTP	Hypertext Transport Protocol
HWCI	hardware configuration item
I&T	integration and test
I/F	interface
I/O	input/output
ICD	interface control document
ICLHW	Ingest Client HWCI
ID	identification
IDE	Interactive Development Environments
IDG	Infrastructure Development Group
IDR	Incremental Design Review
IERS	International Earth Rotation Service
IMS	Information Management System (obsolete ECS element name)
INGST	Ingest Services CSCI
IOS	Interoperability Subsystem
IP	international partners
IR-1	Interim Release 1
IRD	interface requirements document
ISO	International Standards Organization
ISS	Internetworking Subsystem
IV&V	independent verification and validation
JPL	Jet Propulsion Laboratory
L0-L4	Level 0 (zero) through Level 4
LaRC	Langley Research Center (DAAC)
LIM	local information manager (SDPS)

LIMGR	Local Information Manager CSCI
LIS	Lightning Imaging Sensor
LSM	local system management (ECS)
MB	megabyte (10^6)
MDT	mean downtime
MDT	mean downtime
MFLOPS	mega (millions of) floating-point operations (10^6) per second
MISR	Multi-Angle Imaging SpectroRadiometer
MODIS	Moderate-Resolution Imaging Spectrometer
MOPITT	Measurements of Pollution in the Troposphere
MSFC	Marshall Space Flight Center
MSS	Management Support Subsystem
MTBF	mean time between failure
MTPE	Mission to Planet Earth
MTTR	mean time to restore
N/A	not applicable
NAS	National Academy of Science
NASA	National Aeronautics and Space Administration
NESDIS	National Environmental Satellite Data and Information Service
NMC	National Meteorological Center (NOAA)
NOAA	National Oceanic and Atmospheric Administration
NSIDC	National Snow and Ice Data Center (DAAC)
O/A	orbit/altitude
ODC	other data center
OSI	Open System Interconnect
PDPS	Planning and Data Processing Subsystem
PDR	Preliminary Design Review
PDS	production data set
PGE	Product Generation Executive
PGS	Product Generation System (obsolete ECS element name) (ASTER)

PK	Primary Key
PLANG	Production Planning CSCI
PLNHW	Planning HWCI
PLS	Planning Subsystem
POSIX	Portable Operating System Interface for Computer Environments
PR	Precipitation Radar (TRMM)
PRONG	Processing CSCI
QA	quality assurance
RMA	reliability, maintainability, availability
RTF	rich text format
SAA	satellite active archive
SAGE	Stratospheric Aerosol and Gas Experiment
SCF	Science Computing Facility
SDP	Science Data Processing
SDPF	Sensor Data Processing Facility (GSFC)
SDPS	Science Data Processing Segment (ECS)
SDPTK	SDP Toolkit CSCI
SDSRV	Science Data Server CSCI
SeaWIFS II	Sea-Viewing Wide Field-of-View Sensor II
SFDU	Standard Format Data Unit
SMC	System Management Center (ECS)
SPRHW	Science Processing HWCI
SRS	software requirements specification
SSM/I	Special Sensor for Microwave/Imaging (DMSP)
SST	sea surface temperature
STMGMT	Storage Management
STMGT	Storage Management Software CSCI
SUBSRV	Subscription Server
TMI	TRMM Microwave Image
TOMS	Total Ozone Mapping Spectrometer

TONS	TDRS On-board Navigational System
TRMM	Tropical Rainfall Measuring Mission (joint US-Japan)
TSDIS	TRMM Science Data and Information System
USNO	US Naval Observatory
UT	universal time
UTC	universal time code
V0	Version 0
VIRS	Visible Infrared Scanner (TRMM)
WAIS	Wide Area Information Server
WKBCH	Workbench CSCI
WKSHW	Working Storage HWCI
WWW	World Wide Web

This page intentionally left blank.